



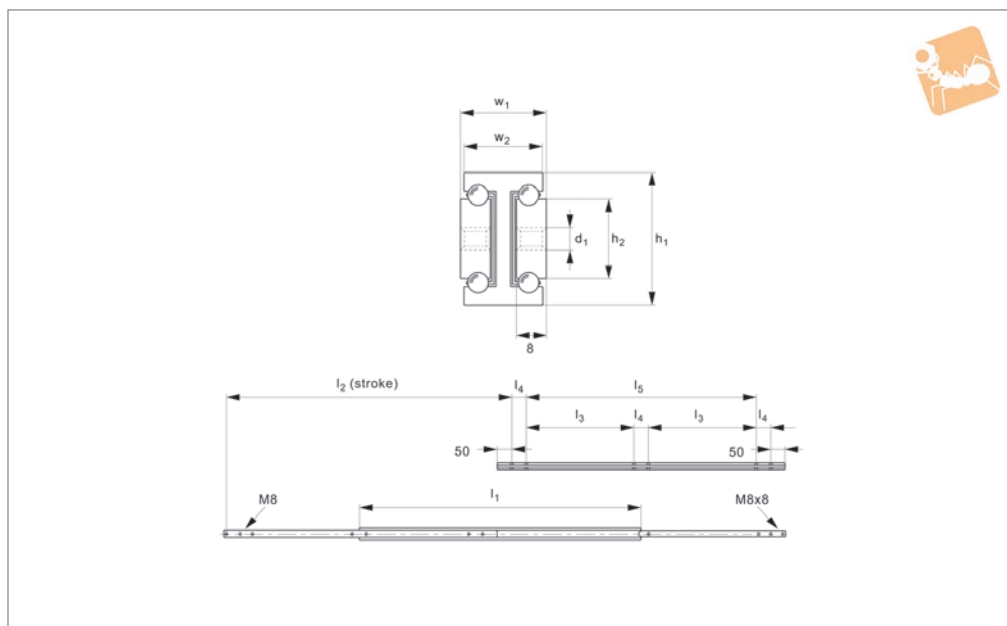

Stainless AISI 316 Slides

fully telescopic, size 40

Telescopic Slides

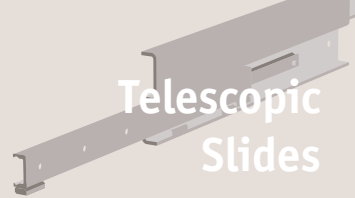

L2051

TELESCOPIC SLIDES

Material

Stainless steel (A4, AISI 316) - rail, balls and ball cage.


an evenly distributed load centred around the mid extension point of the slide. Other sizes on request.

Technical Notes


Full extension. Load ratings are based on

Ideal for applications requiring a high degree of corrosion resistance.

Order No.	l_1	l_2 stroke	h_1	h_2	d_1	l_3	l_4	l_5	w_1	w_2	Load/pair kg max.
L2051.0200	200	200	40	25	M8	-	-	50	24	22	250
L2051.0250	250	250	40	25	M8	-	50	50	24	22	245
L2051.0300	300	300	40	25	M8	-	100	50	24	22	240
L2051.0350	350	350	40	25	M8	-	150	50	24	22	235
L2051.0400	400	400	40	25	M8	-	200	50	24	22	230
L2051.0450	450	450	40	25	M8	-	250	50	24	22	225
L2051.0500	500	500	40	25	M8	-	300	50	24	22	220
L2051.0550	550	550	40	25	M8	150	-	50	24	22	210
L2051.0600	600	600	40	25	M8	175	-	50	24	22	205
L2051.0650	650	650	40	25	M8	200	-	50	24	22	200
L2051.0700	700	700	40	25	M8	225	-	50	24	22	195
L2051.0750	750	750	40	25	M8	250	-	50	24	22	190
L2051.0800	800	800	40	25	M8	275	-	50	24	22	180
L2051.0850	850	850	40	25	M8	300	-	50	24	22	170
L2051.0900	900	900	40	25	M8	325	-	50	24	22	160
L2051.0950	950	950	40	25	M8	350	-	50	24	22	150
L2051.1000	1000	1000	40	25	M8	375	-	50	24	22	140



L1989

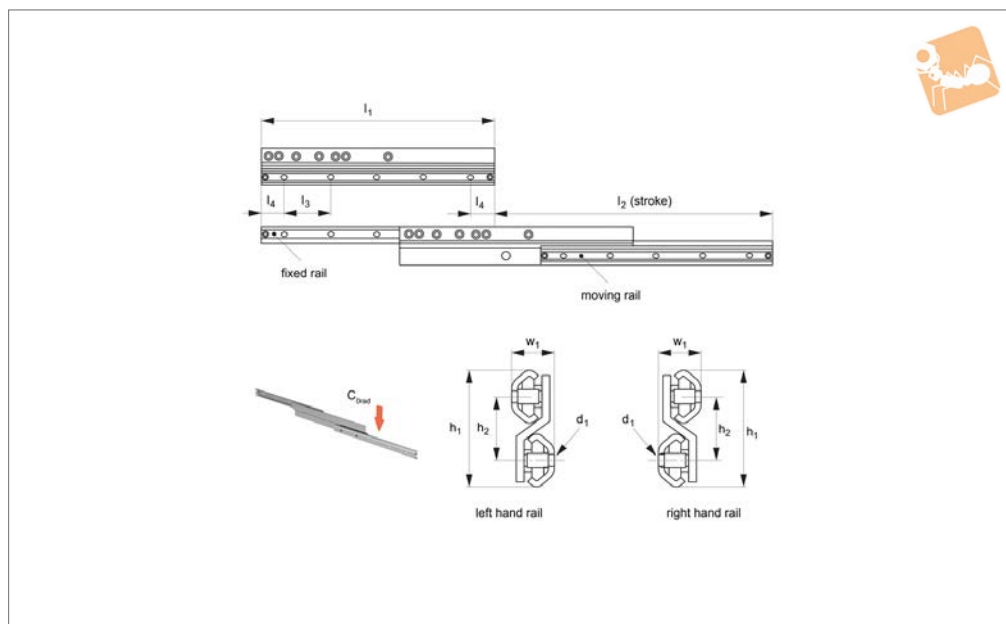

Material

Stainless steel (AISI 316L), bearings stainless steel (AISI 440). Bearings seals, type 2RS (splash-proof).

Technical Notes

Full stainless steel rails for washdown,

pharmaceutical, medical and other applications.

Fixing screw - low height ISO 7380 or Torx screws on request.

Temperature range from -30° to +100°C.

Tips

The bearings and wiper arrangement (rather than small ball bearings) provide a robust defence to dirt and other contaminants.



Order No.	Type	l_1	l_2 stroke	h_1	h_2	l_3	l_4	w_1	For screws d_1	No. of fixing holes (2 rails)	Load (per rail) N	$C_{0\ rad}$	Weight kg
L1989.30-0400L	Left	400	480	65,5	36	80	40	24,3	M5	10	150	max.	1,36
L1989.30-0480L	Left	480	560	65,5	36	80	40	24,3	M5	12	200		1,63
L1989.30-0560L	Left	560	640	65,5	36	80	40	24,3	M5	14	240		1,90
L1989.30-0640L	Left	640	720	65,5	36	80	40	24,3	M5	16	280		2,18
L1989.30-0720L	Left	720	800	65,5	36	80	40	24,3	M5	18	320		2,45
L1989.30-0800L	Left	800	880	65,5	36	80	40	24,3	M5	20	360		2,72
L1989.30-0880L	Left	880	960	65,5	36	80	40	24,3	M5	22	350		2,99
L1989.30-0960L	Left	960	1040	65,5	36	80	40	24,3	M5	24	310		3,26
L1989.30-1040L	Left	1040	1120	65,5	36	80	40	24,3	M5	26	250		3,54
L1989.30-0400R	Right	400	480	65,5	36	80	40	24,3	M5	10	150		1,36
L1989.30-0480R	Right	480	560	65,5	36	80	40	24,3	M5	12	200		1,63
L1989.30-0560R	Right	560	640	65,5	36	80	40	24,3	M5	14	240		1,90
L1989.30-0640R	Right	640	720	65,5	36	80	40	24,3	M5	16	280		2,18
L1989.30-0720R	Right	720	800	65,5	36	80	40	24,3	M5	18	320		2,45
L1989.30-0800R	Right	800	880	65,5	36	80	40	24,3	M5	20	360		2,72
L1989.30-0880R	Right	880	960	65,5	36	80	40	24,3	M5	22	350		2,99
L1989.30-0960R	Right	960	1040	65,5	36	80	40	24,3	M5	24	310		3,26
L1989.30-1040R	Right	1040	1120	65,5	36	80	40	24,3	M5	26	250		3,54



Stainless AISI 316 Slides

fully telescopic, size 50

Telescopic Slides

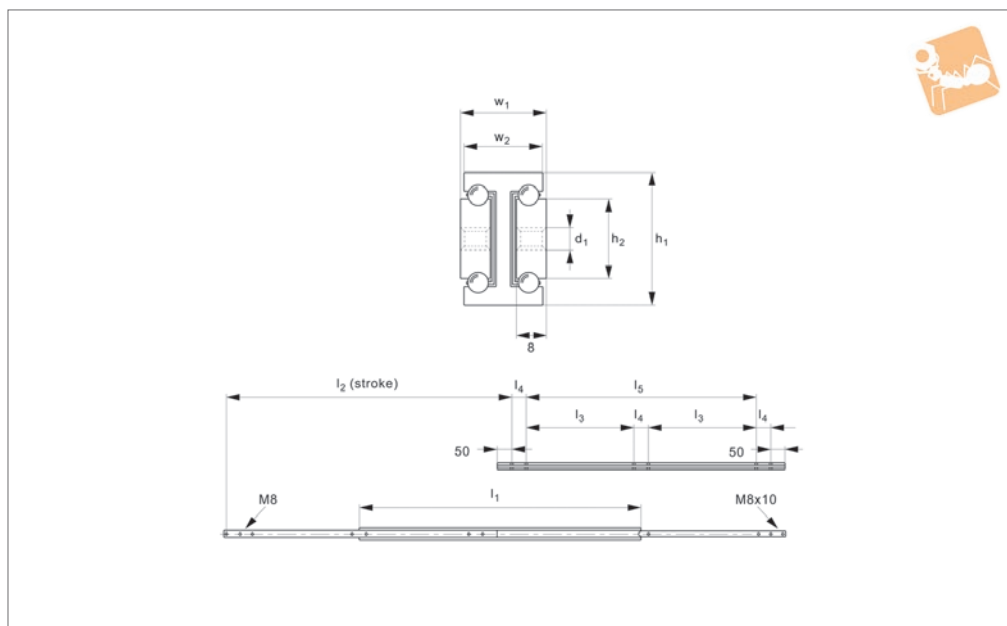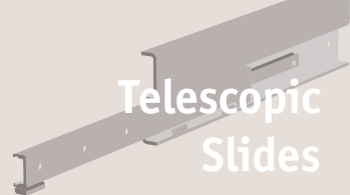

L2052

TELESCOPIC SLIDES

Material

Stainless steel (A4, AISI 316) - rail, balls and ball cage.


an evenly distributed load centred around the mid extension point of the slide. Other sizes on request.

Technical Notes

Full extension. Load ratings are based on

Ideal for applications requiring a high degree of corrosion resistance.

Order No.	l_1	l_2 stroke	h_1	h_2	d_1	l_3	l_4	l_5	w_1	w_2	Load/pair kg max.
L2052.0200	200	200	50	30	M8	-	-	50	30	25	390
L2052.0250	250	250	50	30	M8	-	50	50	30	25	380
L2052.0350	350	350	50	30	M8	-	150	50	30	25	360
L2052.0400	400	400	50	30	M8	-	200	50	30	25	350
L2052.0450	450	450	50	30	M8	-	250	50	30	25	340
L2052.0500	500	500	50	30	M8	-	300	50	30	25	330
L2052.0550	550	550	50	30	M8	150	-	50	30	25	320
L2052.0600	600	600	50	30	M8	175	-	50	30	25	310
L2052.0650	650	650	50	30	M8	200	-	50	30	25	300
L2052.0700	700	700	50	30	M8	225	-	50	30	25	290
L2052.0750	750	750	50	30	M8	250	-	50	30	25	280
L2052.0800	800	800	50	30	M8	275	-	50	30	25	270
L2052.0850	850	850	50	30	M8	300	-	50	30	25	260
L2052.0900	900	900	50	30	M8	325	-	50	30	25	250
L2052.0950	950	950	50	30	M8	350	-	50	30	25	240
L2052.1000	1000	1000	50	30	M8	375	-	50	30	25	230
L2052.1050	1050	1050	50	30	M8	400	-	50	30	25	220
L2052.1100	1100	1100	50	30	M8	425	-	50	30	25	210
L2052.1150	1150	1150	50	30	M8	450	-	50	30	25	205
L2052.1200	1200	1200	50	30	M8	475	-	50	30	25	200
L2052.1250	1250	1250	50	30	M8	500	-	50	30	25	195
L2052.1300	1300	1300	50	30	M8	525	-	50	30	25	190
L2052.1350	1350	1350	50	30	M8	550	-	50	30	25	185
L2052.1400	1400	1400	50	30	M8	575	-	50	30	25	180

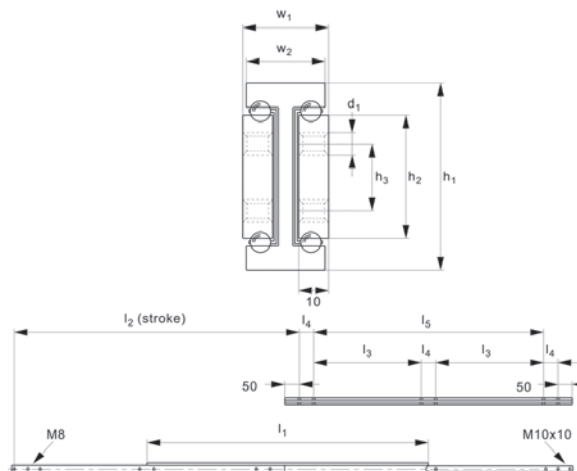

Full extension. Load ratings are based on


Ideal for applications requiring a high degree of corrosion resistance.

4



Stainless AISI 316 Slides

fully telescopic, size 70

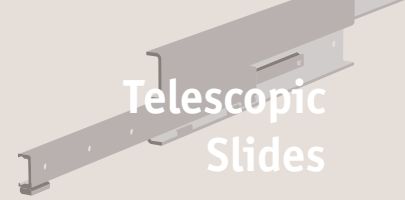

Telescopic Slides

Order No.	l_1	l_2 stroke	h_1	h_2	h_3	d_1	l_3	l_4	l_5	w_1	w_2	Load/pair kg max.
L2054.1950	1950	1950	70	45	25	M8	775	-	100	32	30	160
L2054.2000	2000	2000	70	45	25	M8	800	-	100	32	30	150

TELESCOPIC SLIDES