



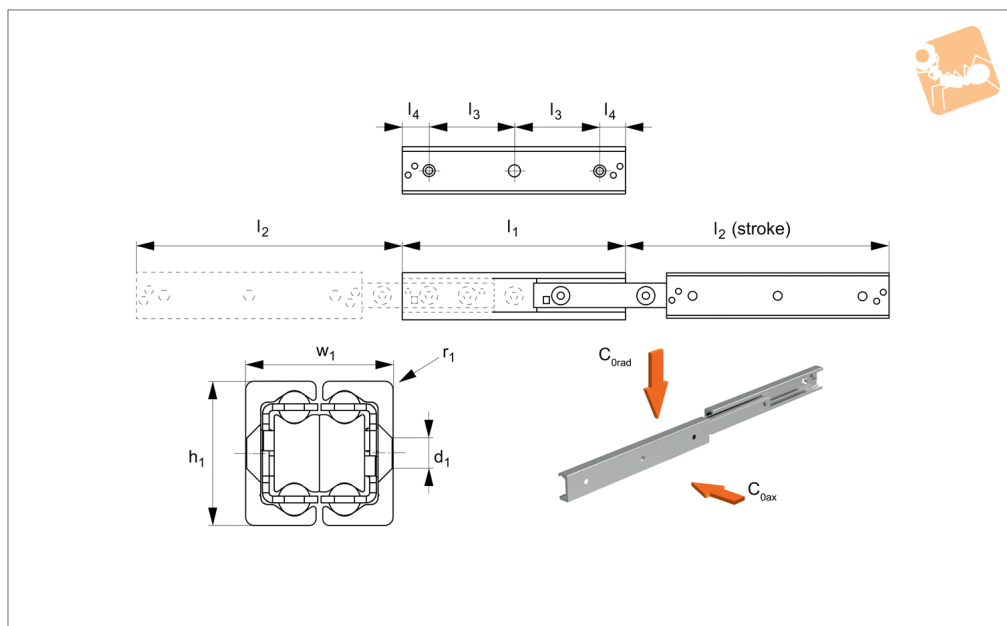

Fully Telescopic Slides

size 35

Telescopic Slides

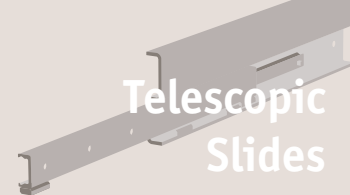

L1988.35

Material

Cold drawn bearing steel raceways hardened to 60 HRC. Balls - hardened steel.

Zinc coating to ISO2081 (excluding raceways). Corrosion resistant coatings available on request.

Technical Notes

These are extremely strong and rigid telescopic slides with high load capacities. C_{0rad} is the load rating for a single telescopic slide.

Temperature range: -30°C to $+170^{\circ}\text{C}$.

The strong intermediate member allows the rail to be mounted with the load acting radially or axially with nearly the same load capacity.

Tips

A double direction stroke can be obtained by removing the end stops screws at the end of each side of the intermediate member.

For double direction strokes, when the moving element has started the stroke in

the opposite direction it will catch the intermediate member and force it to return.

The slides have end stops, but these are not designed to stop a moving, loaded slide. External end stops should be used for this.

Only to be used for horizontal movements. Special strokes up to 130% of the closed length can be provided on request.

Order No.	h_1	l_1	l_2 stroke	l_3	l_4	w_1	r_1	For screws d_1	No. of holes	Load (per rail) C_{0ax}	Load (per rail) C_{0rad}	Weight kg
L1988.35-0210	35	210	254	80	25	34	2	M6	3	286	409	1.15
L1988.35-0290	35	290	318	80	25	34	2	M6	4	569	684	1.60
L1988.35-0370	35	370	406	80	25	34	2	M6	5	534	534	2.05
L1988.35-0450	35	450	494	80	25	34	2	M6	6	439	439	2.55
L1988.35-0530	35	530	558	80	25	34	2	M6	7	403	403	3.00
L1988.35-0610	35	610	646	80	25	34	2	M6	8	346	346	3.55
L1988.35-0690	35	690	734	80	25	34	2	M6	9	304	304	3.90
L1988.35-0770	35	770	798	80	25	34	2	M6	10	286	286	4.45
L1988.35-0850	35	850	886	80	25	34	2	M6	11	256	256	4.90
L1988.35-0930	35	930	974	80	25	34	2	M6	12	232	232	5.30
L1988.35-1010	35	1010	1038	80	25	34	2	M6	13	221	221	5.80
L1988.35-1090	35	1090	1126	80	25	34	2	M6	14	205	205	6.25
L1988.35-1170	35	1170	1214	80	25	34	2	M6	15	187	187	6.70
L1988.35-1250	35	1250	1278	80	25	34	2	M6	16	181	181	7.15
L1988.35-1330	35	1330	1366	80	25	34	2	M6	17	169	169	7.60
L1988.35-1410	35	1410	1454	80	25	34	2	M6	18	160	160	8.10
L1988.35-1490	35	1490	1518	80	25	34	2	M6	19	153	153	8.65