



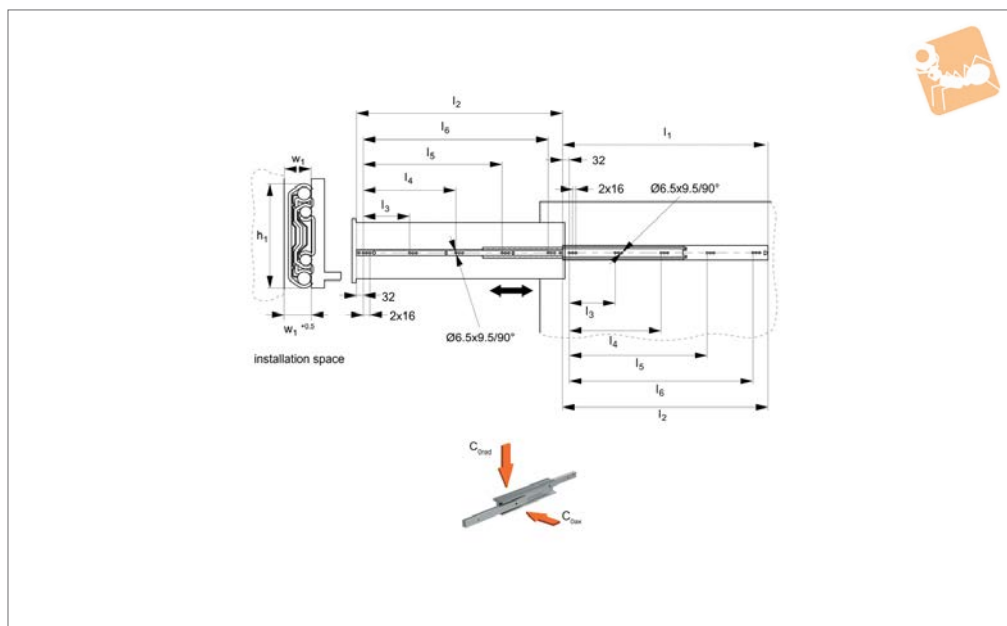

Fully Telescopic Drawer Slide

Telescopic Slides

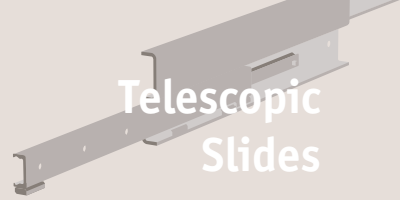

L2013

TELESCOPIC SLIDES

Material

Galvanized steel. Hardened steel balls with zinc-plated cage.

slide and based on 100,000 cycles, uniform load distribution and use of all fixing holes to mount the slide.

Fix rail with M5 countersunk screws (head height 2,5 mm).

Technical Notes

C_{0rad} is the load rating for a single drawer

Tips

Friction locked in closed position.

Order No.	l_1	l_2 stroke	h_1	w_1	l_3	l_4	l_5	l_6	Load (per rail) C_{0ax} N max.	Load (per rail) C_{0rad} N max.	Weight kg
L2013.0400	400	400	70.0	18.0	-	-	-	288	150	525	1.55
L2013.0450	450	450	70.0	18.0	-	-	160	320	150	575	1.74
L2013.0500	500	500	70.0	18.0	-	-	192	384	150	650	1.94
L2013.0550	550	550	70.0	18.0	-	-	224	448	150	650	2.13
L2013.0600	600	600	70.0	18.0	-	-	224	448	150	650	2.32
L2013.0700	700	700	70.0	18.0	-	192	384	576	150	650	2.70
L2013.0800	800	800	70.0	18.0	-	224	448	672	150	600	3.10
L2013.1100	1100	1100	70.0	18.0	224	448	672	896	100	450	4.25