


# Drawer Slide - Full Extension

lever disconnect - 20 Kg load per pair

# Telescopic Slides

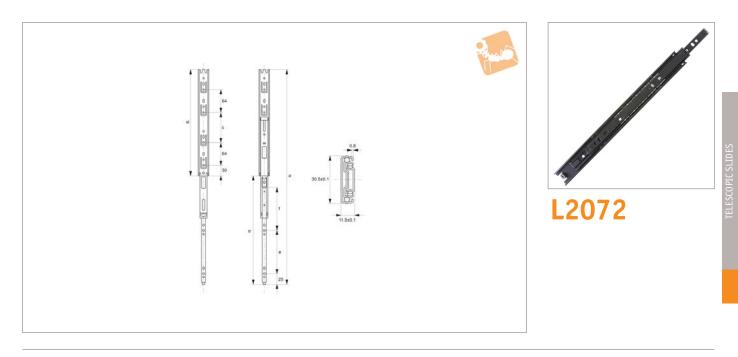

#### Material

Cold rolled steel. Finishing: black

#### **Technical Notes**

Hold-in detent when slide closed. Positive stop. Rails can be disconnected via pres-

sing disconnect lever.

**Important Notes** 

These slides have been tested to 60,000 usage cycles.

Load capacity is static load per pair, at the

centre of the rails using all mounting holes. **Sold individually as single slides.** 

Order No.	Slide length sl	Slide travel tr	а	С	е	f	Load/pair	Weight
							kg max.	g
L2072.AC0200	200	200	400	71	71	71	20	257
L2072.AC0250	250	250	500	99	96	96	20	315
L2072.AC0300	300	300	600	85	121	121	20	370
L2072.AC0350	350	350	700	135	146	146	20	425
L2072.AC0400	400	400	800	185	171	171	20	480
L2072.AC0450	450	450	900	235	191	191	20	532





P2000 - P7200 Drawer Slides

**Drawer Slides** technical information



Weight capacity	Weight capacity/pair Kg - is the static load per pair of drawer slides, measured at the centre of a pair of slides, side mounted, spaced 450mm apart, and is based on use of all fixing points on the slide. Important Note: Flat mounting of drawer slides, as opposed to the standard side mounding of slides, is not recommended as it results in a greatly reduced load capacity equal to only 25% of the stated weight capacity. Slide length (sl) The longest dimension of a fully closed slide, this should not exceed the depth of cabinet in which slide is installed.							
Drawer slide terms								
	Slide travel (tr)	e travel (tr) Distance a drawer slide moves from fully closed position. (slide length + slide travel = fully extended slide length).						
		b						
	<b>Full extension</b> This type of drawer slide can be extended 100% of slide length, this is standard for most 3 piece drawer slides.							
	3/4 extension							
	Positive stop	Drawer stops at extended/open position but does not lock or detent.						
	Positive lock	Drawer is firmly held in extended/open position by means of a mechanical catch. Drawer is released by depressing a lever and pushing drawer inward. From the extended/ open position the same slide may be disconnected by depressing the lever and pulling the drawer out.						
	Hold-in detent	Drawer is firmly held in closed position, and released by pulling drawer open (also known as positive catch).						
	Lever disconnect	ct From the extended/open position the slide may be disconnected by depressing lever and pulling drawer out.						
	Self-closing	Toward end of drawer slide closing stroke, slide is drawn into the fully closed position.						
	Soft self-closing	Toward end of drawer slide closing stroke, slide movement is slowed and then drawn into fully closed position.						
Side mounting tolerances		e recommend a side space equal to s with an additional 0,2 to 0,5 mm oning.						
	can result in poor	s than 0,2 mm side tolerance running of the drawer slide and ide - the same is true if tolerances sed.						
		nclosure faces are square and nounting of the drawer slides.						



slide thickness



### **Wixroyd Drawer Slides**

## **Drawer Slides**

product selection charts

