




Stainless Micrometer X Stages

side drive

Manual Positioning Stages

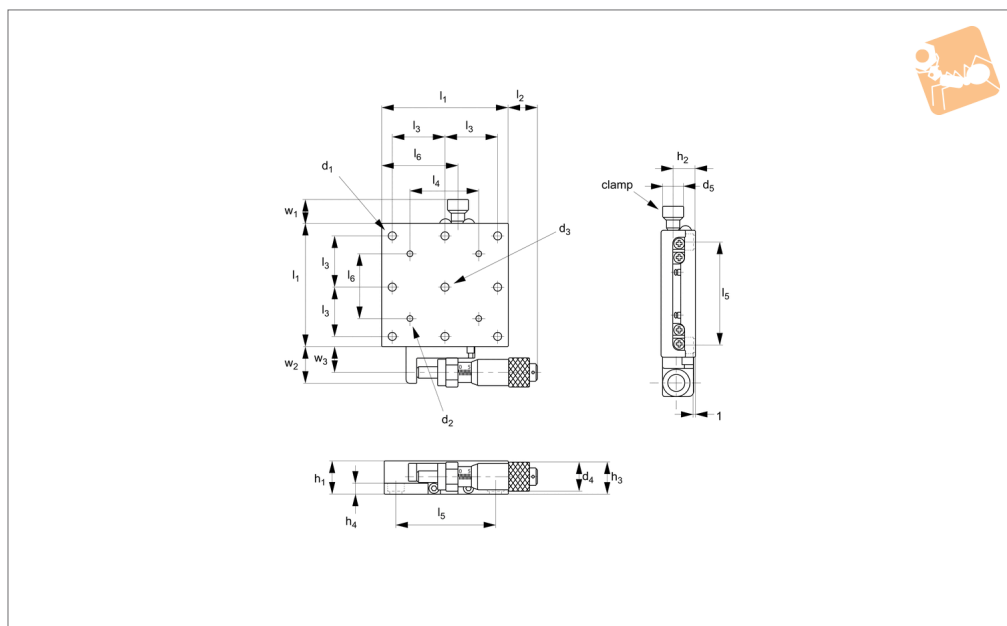

L3122

MANUAL POSITIONING STAGES

Material

Stainless steel (440C) with electroless nickel plating.

Technical Notes

Straightness accuracy 5μ.

Spring loaded micrometer allows precise repeatable adjustments with low friction and zero backlash.

Micrometer increments 0,01mm.

Important Notes

Stroke is centred on the mid-point of the slides (ie 50% of total stroke each way).

3D CAD available.

Order No.	Travel	l_1	l_2	l_3	l_4	l_5	l_6	h_1	h_2	h_3	h_4
L3122.040	13	40	23.7	16	-	32	26	16.0	10.5	9	4.5
L3122.060	13	60	13.8	25	32	50	36	16.0	10.5	9	5.0
L3122.080	25	80	32.5	25	50	70	55	20.0	14.5	10.8	6.5
L3122.100	25	100	17.5	25	70	90	67.5	20.0	14.5	10.8	6.5


Order No.	d_1	d_2	d_3	d_4	d_5	w_1	w_2	Load kg max.
L3122.040	M3	-	4	13	10	18.5	12	10.0
L3122.060	M4	M3	4	13	10	18.5	12	20.0
L3122.080	M4	M4	4	13	10	23.5	17	27.0
L3122.100	M4	M4	4	13	10	23.5	17	35.0



There are two different load ratings for these stages.


Ball slides:

These have precision steel balls rolling in the tracks. They are the least expensive, loads up to 28Kg.



Cross roller slides:


These have the same dimensions but have rollers allowing the slide to carry large loads and absorb greater moment loads up to 54Kg.



Locking options


Posi-lock:

Allows locking of the carriage in place with a friction locking mechanism.

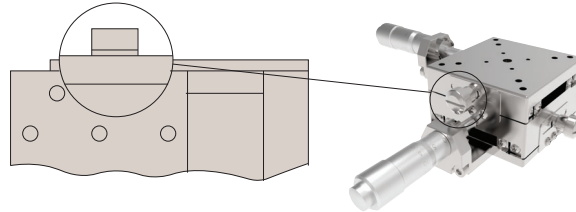


Locking micrometer:


Locking of the micrometer to fix the micrometer setting.

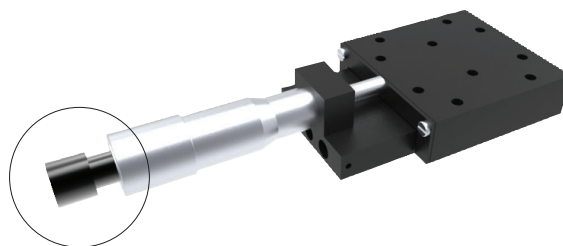

Front drive micrometer positioning stages

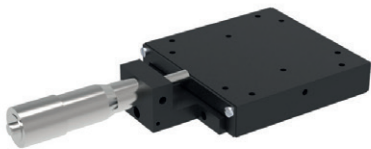

X Stage

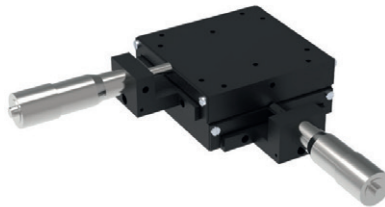

XY Stage




XYZ Stage


Side drive micrometer positioning stages



X Stage

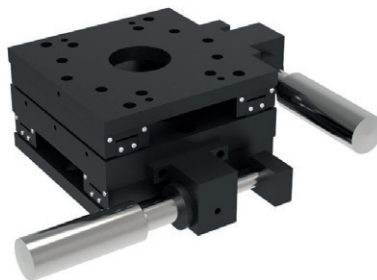

XY Stage

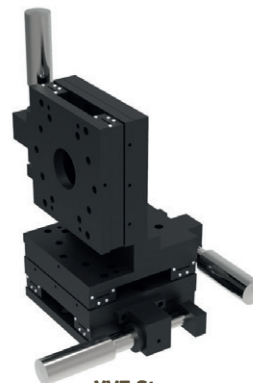

XYZ Stage

Also available in stainless steel.