





Spacers

for part nos. P2180 to P2186

Levelling Feet

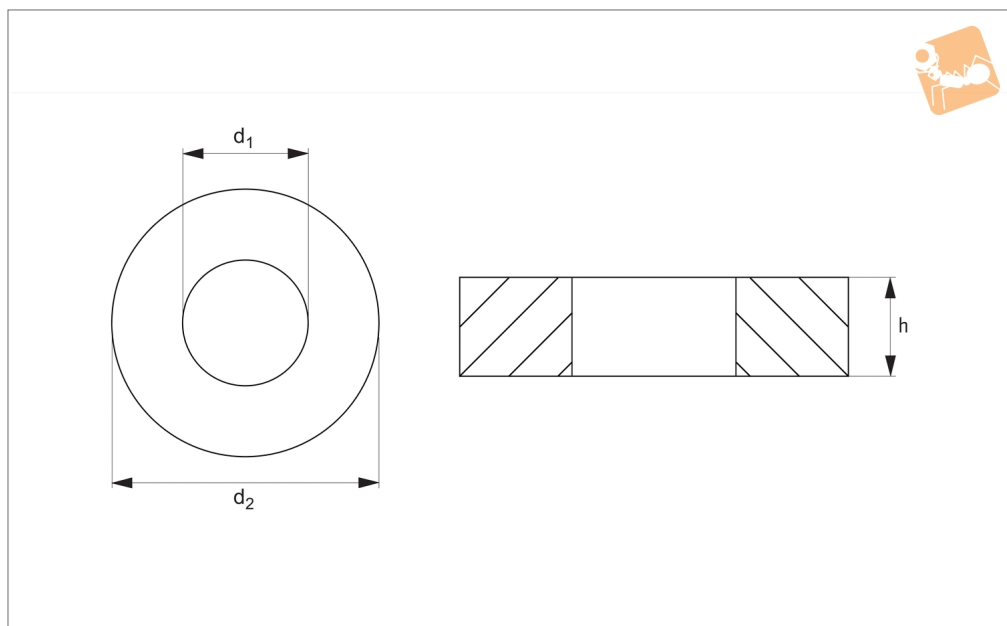

P2187

LEVELLING FEET

Material


Steel (type 42 CrMo4 V, 1.7225) zinc plated or stainless steel A1 (A4 on request).

Technical Notes

Used to bridge gaps on applications where the height adjustment of an adjuster is

insufficient.


Order No.	Material	For bolt	d ₁	d ₂	h
P2187.060-ZP	Steel	M 6	6.6	25	4
P2187.100-ZP	Steel	M10	11.0	32	5
P2187.160-ZP	Steel	M16	17.5	45	6
P2187.240-ZP	Steel	M24	26.0	58	8
P2187.300-ZP	Steel	M30	33.0	70	10
P2187.360-ZP	Steel	M36	39.0	80	12
P2187.480-ZP	Steel	M48	52.0	105	16
P2187.060-A2	Stainless steel	M 6	6.6	25	4
P2187.100-A2	Stainless steel	M10	11.0	32	5
P2187.160-A2	Stainless steel	M16	17.5	45	6
P2187.240-A2	Stainless steel	M24	26.0	58	8
P2187.300-A2	Stainless steel	M30	33.0	70	10
P2187.360-A2	Stainless steel	M36	39.0	80	12
P2187.480-A2	Stainless steel	M48	52.0	105	16




Advantages

- Precision adjusting and re-adjusting.
- Operational under heavy loads.
- Fast installation.
- Greater vertical alignment (from 4 to 105mm).
- Compensation for non-parallel bearing surfaces.
- Suitable for static and dynamic loads.
- Can be anchored to foundation.


Applications

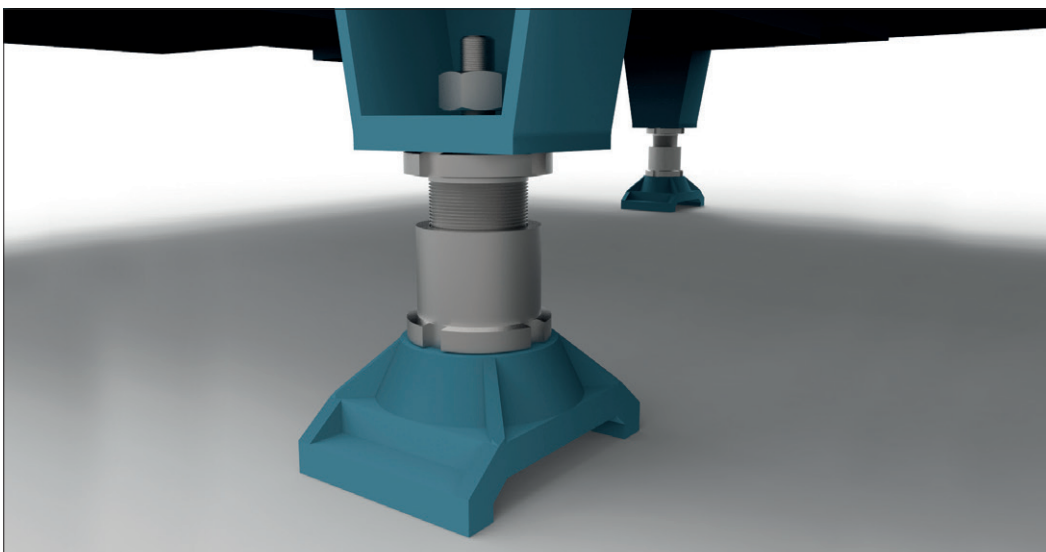


Grounded field mount - Precision Leveller no. 62060 in use on a fully metal encapsulated gas-insulated high voltage switch.

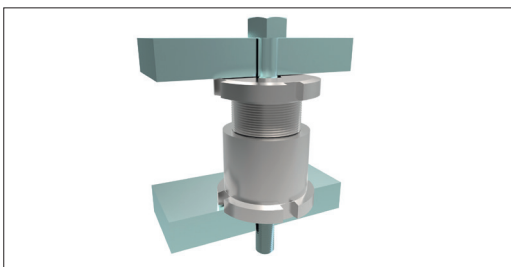


Test stand - Precision Levellers provide adjustment for the connection shaft between motor and transmission.

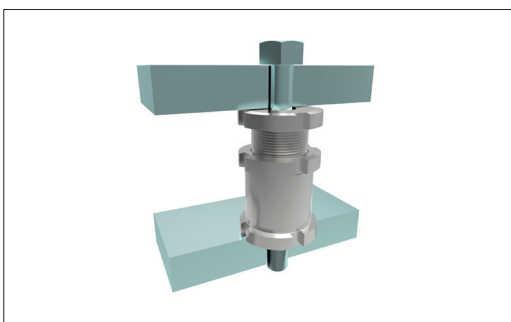

Plumber blocks - even multiple bearings can be levelled easily and precisely, here part no. 62000 is in use.

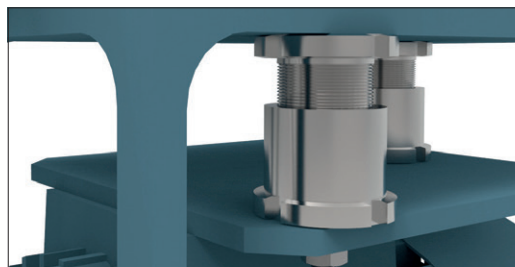

Drive train application - in this application Wixroyd Precision Levellers are used to adjust the rig to ensure correct tension of the V-belt, and to provide full support of the top mounted electric drive motor.

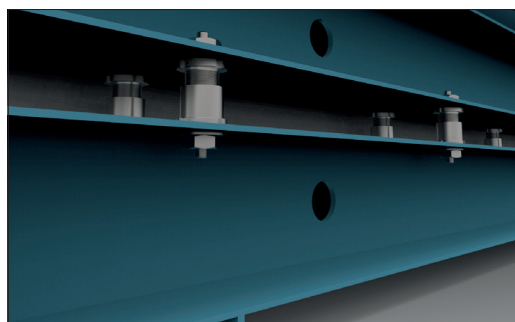

Extruder - precision adjustment of an extruder with leveller no. 62008.




Precision Levelling Adjusters


62000 - 62160
Materials Handling

Wixroyd Precision Levelling Adjusters enable accurate levelling, locating and adjusting of motors, machinery and much more, under heavy loads.

There are three key features to the design, firstly the fine threaded mounting bolt, secondly the threaded nut base and thirdly the end-stop. The fine thread of the mounting bolt and base provides precise adjustment, as well as easy re-adjustment by means of a hook spanner to DIN 1810A, see part no. 95400.

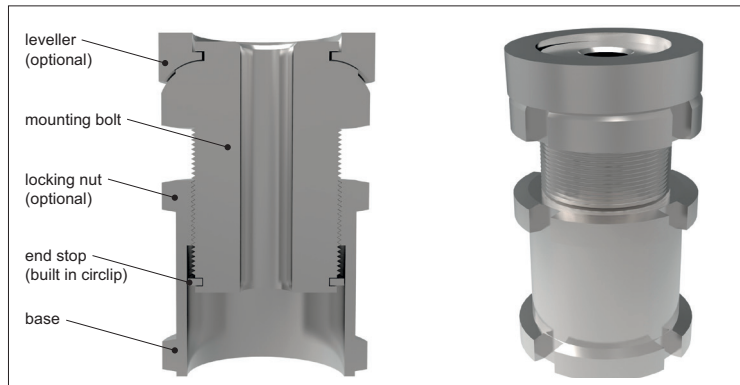


Design features



62000 - Designed for applications with limited space - height adjustment is between 4 and 14mm.



62040 - Designed for applications requiring both height adjustment (from 4 to 14mm) and precise adjustment of non-parallel surfaces, with a maximum angle of tilt 4°.



62060 - Designed for applications where a wide adjustment range is required - height adjustment equal to 15 to 55mm.



62080 - Designed for applications with a dynamic load, or where no fasteners are used. The locknut enables locking of the adjuster in the pre-set position.

Product range



62100 - For applications requiring both height adjustment (from 15 to 55mm) and precise adjustment of non-parallel surfaces, with a max. angle of tilt 4°.




62120 - The same features as part number 62100, but with the added feature of a locknut to fix adjuster in any position.




62140/62160 - Designed for applications requiring precise adjustment of non-parallel surfaces, with a maximum angle tilt 4°. The ball shim has no height adjustment feature.

Precision adjusters



Precision levellers



Adjusters vs. levellers

Features	62000	62002	62040	62042	62060	62080	62100	62120
Adjustment travel 4-14mm	✓	✓	✓	✓				
Adjustment travel 15-55mm					✓	✓	✓	✓
Lock nut		✓		✓		✓		✓
Slope adjustment up to 4°			✓	✓			✓	✓
Captive screw feature	✓	✓	✓	✓	✓	✓	✓	✓