

R3583

ROD ENDS

Material

Housing: Black plastic (Igumid G).
Spherical Bearing: Iglidur w300.

Technical Notes

Maintenance free, self lubricating. High strength under impact loads. Very high tensile strength for varying loads. Resistant to dirt and dust, resistant to

corrosion and chemicals, standard thread is right hand thread. High vibration dampening capacity, suitable for rotating, oscillating and linear movements. Available with a metal sleeve to take a higher torque, (add -MS to part No.) Suitable for use with R3409 clevis joints.

Important Notes

Dimensional series E. *Denotes fine pitch thread. Short term max axial strength is up to 20 minutes. Any length of time greater than this is considered long term.

Order No.	Thread hand	d ₁ tol. E10	l ₁	d ₂	d ₃	l ₂	a°	l ₃	w ₁
R3583.R005	Right	5	36	M5	19	20	16.5	45.5	6
R3583.R006	Right	6	36	M6	21	20	13.5	46.5	6
R3583.R008	Right	8	41	M8	24	24	12	53.0	8
R3583.R010	Right	10	47.5	M10	29	27	12	62.0	9
R3583.R011	Right	10	47.5	M10 x 1,25*	9	27	12	62.0	9
R3583.R012	Right	12	54	M12	34	29	10.5	71.0	10
R3583.R013	Right	12	54	M12 x 1,25*	34	29	10.5	71.0	10
R3583.R015	Right	15	63	M14	40	34	10.5	83.0	12
R3583.R017	Right	17	69	M16	46	37	9	92.0	14
R3583.R018	Right	17	69	M16 x 1,5*	46	37	9	92.0	14
R3583.R020	Right	20	80	M20 x 1,5*	53	43	8	106.5	16
R3583.R021	Right	20	80	M20 x 2,5	53	53	8	106.5	16
R3583.R025	Right	25	97	M24 x 2*	64	53	8	129.0	20
R3583.R030	Right	30	113	M30 x 2*	73	65	12.5	149.5	22
R3583.L005	Left	5	36	M5	19	20	16.5	45.5	6
R3583.L006	Left	6	36	M6	21	20	13.5	46.5	6
R3583.L008	Left	8	41	M8	24	24	12	53.0	8
R3583.L010	Left	10	47.5	M10	29	27	12	62.0	9
R3583.L011	Left	10	47.5	M10 x 1,25*	9	27	12	62.0	9
R3583.L012	Left	12	54	M12	34	29	10.5	71.0	10
R3583.L013	Left	12	54	M12 x 1,25*	34	29	10.5	71.0	10
R3583.L015	Left	15	63	M14	40	34	10.5	83.0	12
R3583.L017	Left	17	69	M16	46	37	9	92.0	14
R3583.L018	Left	17	69	M16 x 1,5*	46	37	9	92.0	14
R3583.L020	Left	20	80	M20 x 1,5*	53	43	8	106.5	16
R3583.L021	Left	20	80	M20 x 2,5	53	53	8	106.5	16
R3583.L025	Left	25	97	M24 x 2*	64	53	8	129.0	20
R3583.L030	Left	30	113	M30 x 2*	73	65	6.5	149.5	22




ROD ENDS

Order No.	w ₂	Radial load (long term) N max.	Radial load (short term) N max.	Static strength (long term) N max.	Static strength (short term) N max.	Thread depth min.	Torque strength outside thread Nm max.	Torque through ball Nm max.
R3583.R005	4.4	25	50	275	550	14	0.4	2.0
R3583.R006	4.4	40	80	425	850	14	0.5	2.5
R3583.R008	6.0	80	160	800	1600	17	2.0	7.0
R3583.R010	7.0	125	250	1300	2600	19	5.0	14.0
R3583.R011	7.0	125	250	1300	2600	19	3.0	14.0
R3583.R012	8.0	150	300	1550	3100	20	6.0	25.0
R3583.R013	8.0	150	300	1550	3100	20	6.0	25.0
R3583.R015	10.0	300	600	1700	3400	24	12.5	30.0
R3583.R017	11.0	450	900	1800	3600	26	17.5	35.0
R3583.R018	11.0	450	900	1800	3600	26	21.0	35.0
R3583.R020	13.0	850	1700	3400	6800	30	25.0	40.0
R3583.R021	13.0	850	1700	3400	6800	30	25.0	40.0
R3583.R025	17.0	500	1000	3500	7000	37	45.0	55.0
R3583.R030	19.0	1000	2000	3500	7000	46	85.0	70.0
R3583.L005	4.4	25	50	275	550	14	0.4	2.0
R3583.L006	4.4	40	80	425	850	14	0.5	2.5
R3583.L008	6.0	80	160	800	1600	17	2.0	7.0
R3583.L010	7.0	125	250	1300	2600	19	5.0	14.0
R3583.L011	7.0	125	250	1300	2600	19	3.0	14.0
R3583.L012	8.0	150	300	1550	3100	20	6.0	25.0
R3583.L013	8.0	150	300	1550	3100	20	6.0	25.0
R3583.L015	10.0	300	600	1700	3400	24	12.5	30.0
R3583.L017	11.0	450	900	1800	3600	26	17.5	35.0
R3583.L018	11.0	450	900	1800	3600	26	21.0	35.0
R3583.L020	13.0	850	1700	3400	6800	30	25.0	40.0
R3583.L021	13.0	850	1700	3400	6800	30	25.0	40.0
R3583.L025	17.0	500	1000	3500	7000	37	45.0	55.0
R3583.L030	19.0	1000	2000	3500	7000	46	85.0	70.0


All of our rod ends incorporate either a plain spherical bearing, ball bearing, or roller bearing. Below is an overview of each type.

Plain spherical bearings



- A** Made from Polyamid-PTFE-fibreglass-compound, maintenance free, absorbs any foreign particles
- B** Ball made of bearing steel, hardened, ground, polished and hard chromium plated, ensures reliable corrosion protection
- C** No clearance - radial clearance 0-10µm
- D** All rod ends housings made of forged steel, tempered, extremely high loads resistant

Ball and roller bearings

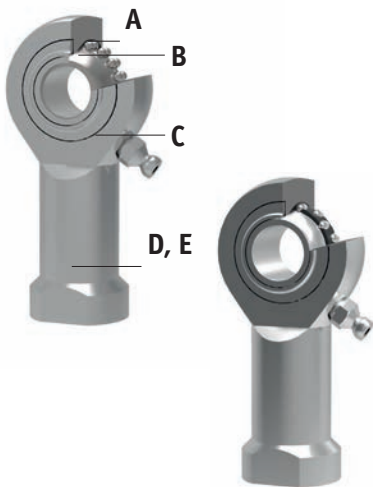

- A** Radial clearance: 10-30µm, low friction
- B** Inner ring made of bearing steel, hardened ball grooves polished
- C** Shields on both sides protect against rough dirt penetration
- D** All rod ends housings are made of forged steel, case hardened bearing race
- E** Low maintenance due to long-term greasing, especially suitable for high speed large swiveling angles or rotating movements

Rod ends and water



Stainless steel versions

Most of our rod ends are available in stainless steel as standard

High grade AISI 316 stainless steel available on request

Rod Ends from Automation Components

ROD ENDS



Rod ends with integral maintenance-free spherical plain bearings

In many cases heavy-duty rod ends with integral spherical plain bearings are most often used. They are above all used for small swivelling or tilting movements at low speeds. They stand out for their high load capacity and can also be used for shock-like loads. The rod end ball slides on a plastic bearing shell consisting of a glass fibre-filled nylon/teflon compound. This design assures a maintenance-free rod end. Heavy-duty plain bearing rod ends have slight initial movement friction and virtually no clearance. The plastic material used has another advantage in that it can absorb many foreign particles so that no damage can occur. The balls of heavy-duty rod ends with integral spherical plain bearings are hard chrome plated. This reliable corrosion protection ensures that the function of the rod end will not be affected by a corroded ball surface under humid operating conditions.

Rod ends with integral ball bearings

This design is especially suitable for high speeds, large swivelling angles or rotating movements with relatively low or medium loads. Prominent technical features are the low bearing friction, long-time greasing as well as the sealing against some dirt penetration (by means of shields on both sides). Under normal operating conditions the rod ends are maintenance-free.

Greasing nipples are provided for lubrication in case of rough operations and maximum loads. To avoid incompatibility with the production lubrication, we recommend lubrication with a calcium-complex-soap-grease. A special heat treatment procedure gives the rod end housing a raceway hardness adapted to the antifriction bearing, ensuring at the same time high stability with changing loads.

Rod ends with integral roller bearings

This design based on the structure of a self-aligning roller bearing is preferably used for high speed, large tilting angles or rotating movements under high loads. Compared to rod ends with ball bearings, rod ends with self-aligning roller bearings have essentially higher basic load ratings. This design is equipped with a cage to minimise the rolling friction and heat build-up. These rod ends, with long-time lubrication are under normal operating conditions maintenance-free.

Greasing nipples are provided for lubrication in case of rough operations and maximum loads. To avoid incompatibility with the production lubrication, we recommend lubricating with a calcium-complex-soap-grease.

Shields on both sides limit dirt particles from penetrating into the bearing. The rod ends with roller bearings are, subjected to a special heat treatment to obtain a raceway hardness adapted to the antifriction bearings, ensuring at the same time a high stability with changing loads.



Static load capacity C_0 (plain bearings)

The static load capacity C_0 is the radially acting static load which does not cause any permanent deformation of the components when the spherical bearing or rod end is stationary, (i.e. the load condition without pivoting, swivelling or tilting movements).

It is also a precondition here that the operating temperature must be at normal room temperature and the surrounding components must possess sufficient stability.

The values specified in the tables are determined by static tension tests on a representative number of series components at 20°C normal room temperature. The static load capacity may vary with lower or higher temperature depending on the material.

In the case of all rod ends with plain bearings, the static load rating refers to the maximum permissible static load of the rod end housing in a tensile direction up to which no permanent deformation occurs at the weakest housing cross-section. The value in the product tables has a safety factor of 1.2 times the tensile strength of the rod ends housing material.

Static load capacity C_0 (roller and ball bearings)

For our rod ends with roller and ball bearings, the static load rating is the load at which the bearing can operate at room temperature without its performance being impaired as a result of deformations, fracture, or damage to the sliding contact surfaces (max 1/10,000th of the ball diameter).

Dynamic load capacity C (plain bearings)

Dynamic load ratings serve as values for calculation of the service life of dynamically-loaded spherical bearings and rod ends. The values themselves do not provide any information about the effective dynamic load capacity of the spherical bearing or rod end. To obtain this information, it is necessary to take into account the additional influencing factors such as load type, swivel or tilt angle, speed characteristic, max. permitted bearing clearance, max. permitted bearing friction, lubrication conditions and temperature, etc.

Dynamic load capacities depend on the definition used to calculate them. Comparison of values is not always possible owing to the different definitions used by various manufacturers, and because the load capacities are often determined under completely different test conditions.

Dynamic load capacity C (roller and ball bearings)

For our rod ends with roller and ball bearings, the dynamic load capacity is the load at which 90% of a large quantity of identical rod ends reach 1 million revolutions before they fail (due to fatigue of the rolling surfaces).



Low cost rod ends load ratings

The ultimate radial static load rating is measured as the failure point when a load is increasingly applied to a pin through the rod end's bore and pulled straight up while the rod end is held in place. Note that the actual rating is determined by calculating the lowest of the following three values:

1: Raceway material comprehensive strength (R value):

$$R = E \times T \times X$$

2: Rod end head strength (H value, cartridge type construction):

$$H = \left[\left(\frac{T}{2} \sqrt{D^2 - T^2} \right) + \left(\frac{D^2}{2} \times \sin^{-1} \frac{T}{2} \right) - (\text{O.D. of Bearing} \times T) \right] \times X$$

Angle of $\frac{T}{2}$ expressed in radians


3: Shank strength (S Value) male threaded rod end:

$$S = [(\text{root diameter of thread}^2 \times .78) - (N^2 \times .78)] \times X$$

female threaded rod end:

$$S_2 = [(J^2 \times .78) + (\text{major diameter of thread} \times .78)] \times X$$

- Where: E = Ball diameter
 T = Housing width
 X = Allowable stress
 D = Head diameter
 N = Diameter of drilled hole in shank of male rod end
 J = Shank diameter of female rod end




The axial static load capacity is measured as the force required to cause failure via a load parallel to the axis of the bore. Depending on the material types and construction methods, the ultimate axial load is generally 10-20% of the ultimate radial static load. The formula does not account for the bending of the shank due to a moment of force, nor the strength of the stake in cartridge-type construction.

Axial strength (A Value):

$$A = .78 [(E + .176T)^2 - E^2] \times X$$

- Where: X = Allowable stress (see table below)
 E = Ball diameter
 T = Housing width



Material	Allowable stress (PSI)
300 Series Stainless Steel	35,000
Low Carbon Steel	52,000

Rod Ends from Automation Components

ROD ENDS