



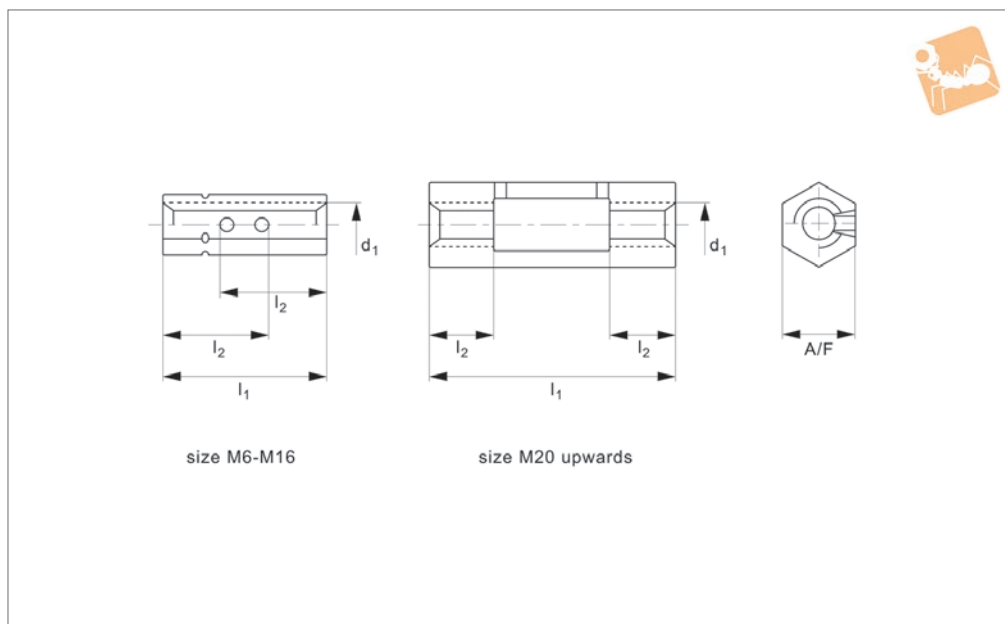

Hexagonal Body Turnbuckles

stainless steel

Turnbuckles

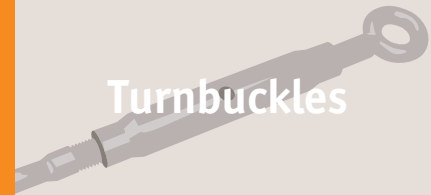

R3826

TURNBUCKLES

Material

Stainless steel (A4).

Technical Notes

To DIN 1479.

Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning

by rotating turnbuckle body without twisting attached rope or cable.

Important Notes

L2 dimension indicates the length of thread from each end that has been overcut.

This means you can screw from one end a total of length l2. Please note if screwing

in from both ends the length of thread is half l2.

Sizes M6-M16, have overlapping thread, from M20 middle part is relieved.

Turnbuckles are not to be used for lifting. Only suitable for use in tension.

| Order No. | d ₁ | l ₁ | l ₂ | A/F | Adjustment | Weight kg |
|--------------|----------------|----------------|----------------|-----|------------|--------------|
| R3826.006-A4 | M 6 | 30 | 22.5 | 10 | 15 | 0.02 |
| R3826.008-A4 | M 8 | 35 | 25.0 | 13 | 15 | 0.03 |
| R3826.010-A4 | M10 | 45 | 33.0 | 16 | 21 | 0.06 |
| R3826.012-A4 | M12 | 55 | 40.0 | 18 | 25 | 0.09 |
| R3826.016-A4 | M16 | 75 | 55.0 | 24 | 35 | 0.18 |
| R3826.020-A4 | M20 | 95 | 24.0 | 30 | 47 | 0.32 |
| R3826.024-A4 | M24 | 115 | 29.0 | 36 | 57 | 0.53 |
| R3826.030-A4 | M30 | 125 | 36.0 | 46 | 53 | 1.08 |