



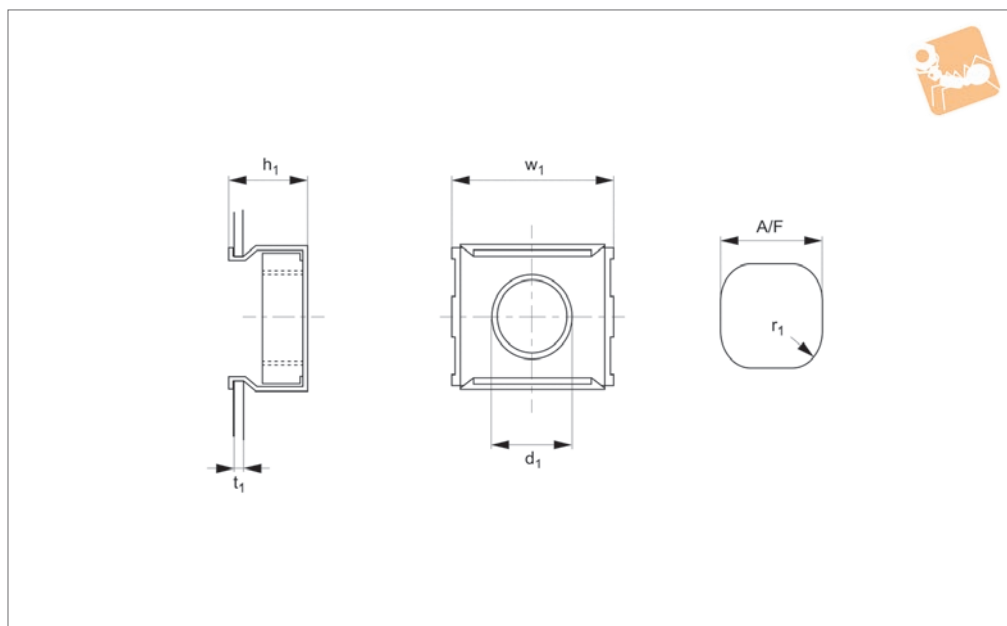

# Cage Nuts

Cage nuts - A2 stainless

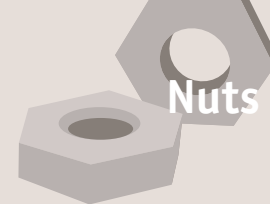

**P0325.A2**

NUTS

## Material

Stainless steel (A2, AISI 303).

## Technical Notes

A/F is hole size across flats.


$r = 0,5$ . Select the part number according to the thread required and the thickness of the preferred material.

| Order No.        | For panel $t_1$ | $d_1$ | $w_1$<br>$\pm 0.5$ | A/F  | $h_1$<br>$\pm 0.3$ |
|------------------|-----------------|-------|--------------------|------|--------------------|
| P0325.040-016-A2 | 0,7-1,6         | M 4   | 13.2               | 9.5  | 8.5                |
| P0325.040-026-A2 | 1,7-2,6         | M 4   | 13.2               | 9.5  | 9.5                |
| P0325.040-035-A2 | 2,7-3,5         | M 4   | 13.2               | 9.5  | 10.5               |
| P0325.050-016-A2 | 0,7-1,6         | M 5   | 13.2               | 9.5  | 8.5                |
| P0325.050-026-A2 | 1,7-2,6         | M 5   | 13.2               | 9.5  | 9.5                |
| P0325.050-035-A2 | 2,7-3,5         | M 5   | 13.2               | 9.5  | 10.5               |
| P0325.060-016-A2 | 0,7-1,6         | M 6   | 13.2               | 9.5  | 8.5                |
| P0325.060-026-A2 | 1,7-2,6         | M 6   | 13.2               | 9.5  | 9.5                |
| P0325.060-035-A2 | 2,7-3,5         | M 6   | 13.2               | 9.5  | 10.5               |
| P0325.080-017-A2 | 0,7-1,7         | M 8   | 16.5               | 12.8 | 10.5               |
| P0325.080-031-A2 | 1,8-3,1         | M 8   | 16.5               | 12.8 | 12.0               |
| P0325.080-043-A2 | 3,2-4,3         | M 8   | 16.5               | 12.8 | 13.5               |
| P0325.100-017-A2 | 0,7-1,7         | M10   | 16.5               | 12.8 | 10.5               |
| P0325.100-031-A2 | 1,8-3,1         | M10   | 16.5               | 12.8 | 12.0               |
| P0325.100-043-A2 | 3,2-4,3         | M10   | 16.5               | 12.8 | 13.5               |




## Cage Nuts

Cage nuts, steel zinc-plated

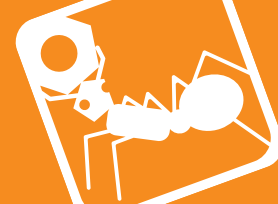

### P0325.ZP

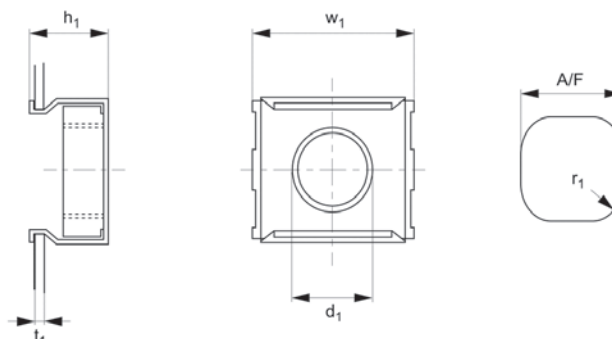

#### Material

Steel, zinc-plated.

#### Technical Notes

A/F is hole size across flats.



$r = 0,5$ . Select the part number according to the thread required and the thickness of the preferred material.

| Order No.        | For panel $t_1$ | $d_1$ | $w_1$<br>$\pm 0,5$ | A/F  | $h_1$<br>$\pm 0,3$ |
|------------------|-----------------|-------|--------------------|------|--------------------|
| P0325.030-016-ZP | 0,7-1,6         | M 3   | 10,5               | 6,8  | 7,2                |
| P0325.040-016-ZP | 0,7-1,6         | M 4   | 13,2               | 9,5  | 8,6                |
| P0325.040-026-ZP | 1,7-2,6         | M 4   | 13,2               | 9,5  | 9,5                |
| P0325.040-032-ZP | 2,0-3,2         | M 4   | 13,2               | 9,5  | 10,2               |
| P0325.050-016-ZP | 0,7-1,6         | M 5   | 13,2               | 9,5  | 8,6                |
| P0325.050-026-ZP | 1,7-2,6         | M 5   | 13,2               | 9,5  | 9,5                |
| P0325.050-032-ZP | 2,0-3,2         | M 5   | 13,2               | 9,5  | 10,2               |
| P0325.060-016-ZP | 0,7-1,6         | M 6   | 13,2               | 9,5  | 8,6                |
| P0325.060-026-ZP | 1,7-2,6         | M 6   | 13,2               | 9,5  | 9,5                |
| P0325.060-032-ZP | 2,0-3,2         | M 6   | 13,2               | 9,5  | 10,2               |
| P0325.080-016-ZP | 0,7-1,6         | M 8   | 17,8               | 12,8 | 10,6               |
| P0325.080-026-ZP | 1,7-2,6         | M 8   | 17,8               | 12,8 | 11,5               |
| P0325.080-043-ZP | 2,7-4,3         | M 8   | 17,8               | 12,8 | 13,0               |
| P0325.100-016-ZP | 0,7-1,6         | M10   | 17,8               | 12,8 | 10,6               |
| P0325.100-026-ZP | 1,7-2,6         | M10   | 17,8               | 12,8 | 11,5               |
| P0325.100-043-ZP | 2,7-4,3         | M10   | 17,8               | 12,8 | 13,0               |



# Sheet Metal Nuts

## lug nuts

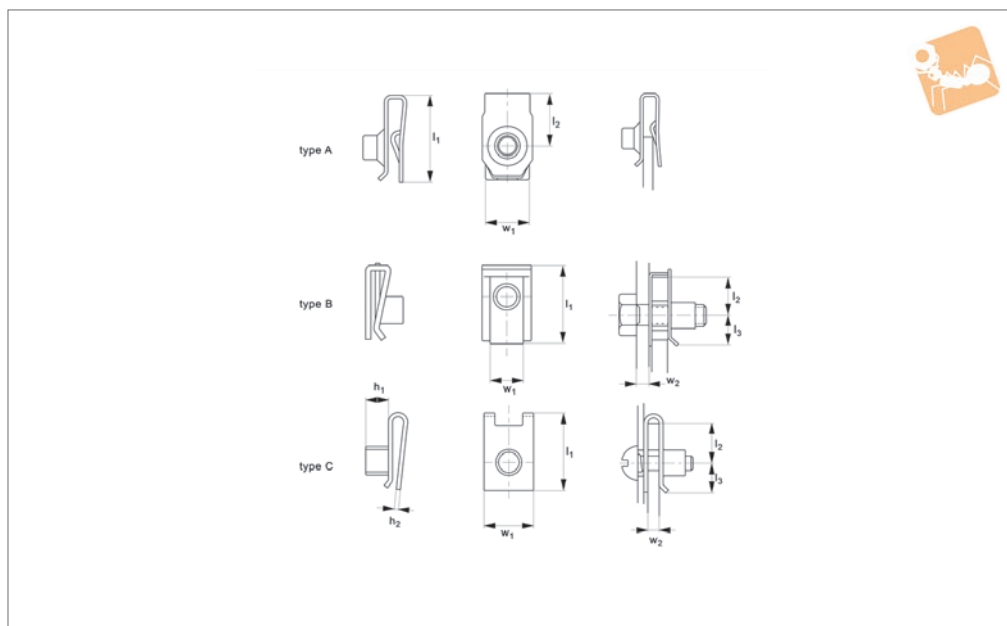

**P0326**

NUTS

### Material

Steel, zinc-plated.

### Technical Notes

Lug nuts are used where U nuts are not

strong enough. They provide a degree of adjustment to assist screw alignment.

Select the part number according to the thread required, the thickness of the

preferred material and the type of nut required.

| Order No.        | For thread | w <sub>1</sub> | l <sub>1</sub> | l <sub>2</sub> | l <sub>3</sub> | h <sub>1</sub> | h <sub>2</sub> | w <sub>2</sub> | Type |
|------------------|------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|------|
| P0326.060-040-A1 | M 6        | 0,8-4,0        | 24,0           | 12,5           | -              | -              | -              | 14,2           | A    |
| P0326.080-040-A1 | M 8        | 0,8-4,0        | 26,0           | 12,0           | -              | -              | -              | 17,2           | A    |
| P0326.100-055-A1 | M10        | 1,5-5,5        | 32,7           | 18,0           | -              | -              | -              | 18,5           | A    |
| P0326.040-040-B1 | M 4        | 0,5-4,0        | 15,0           | 7,3            | 7,0            | 5,0            | 0,6            | 10,0           | B    |
| P0326.050-040-B2 | M 5        | 0,5-4,0        | 20,0           | 11,0           | 8,8            | 5,5            | 0,7            | 14,0           | B    |
| P0326.060-040-B1 | M 6        | 0,5-4,0        | 18,8           | 8,4            | 8,4            | 7,5            | 0,8            | 16,0           | B    |
| P0326.060-040-B2 | M 6        | 0,5-4,0        | 22,2           | 12,0           | 9,8            | 7,0            | 0,8            | 15,0           | B    |
| P0326.080-040-B2 | M 8        | 0,5-4,0        | 24,3           | 13,0           | 10,8           | 9,0            | 1,0            | 17,0           | B    |
| P0326.040-015-C1 | M 4        | 0,5-1,5        | 15,5           | 7,5            | 6,5            | 4,5            | 0,8            | 12,0           | C    |
| P0326.040-020-C1 | M 4        | 0,5-2,0        | 15,5           | 7,5            | 6,5            | 4,5            | 0,8            | 12,0           | C    |
| P0326.050-015-C1 | M 5        | 0,5-1,5        | 15,5           | 7,5            | 6,5            | 5,0            | 0,8            | 12,0           | C    |
| P0326.050-020-C1 | M 5        | 0,5-2,0        | 15,5           | 7,5            | 6,5            | 5,0            | 0,8            | 12,0           | C    |
| P0326.060-015-C1 | M 6        | 0,5-1,5        | 15,5           | 7,5            | 6,5            | 5,5            | 0,8            | 12,0           | C    |
| P0326.060-020-C1 | M 6        | 0,5-2,0        | 15,5           | 7,5            | 6,5            | 5,5            | 0,8            | 12,0           | C    |
| P0326.050-040-B1 | M 5        | 0,5-4,0        | 15,0           | 7,3            | 7,0            | 5,5            | 0,6            | 12,0           | B    |

