




Safety Fastener - Imperial (SLI) for bolts and shafts

Clevis Joints & Clips

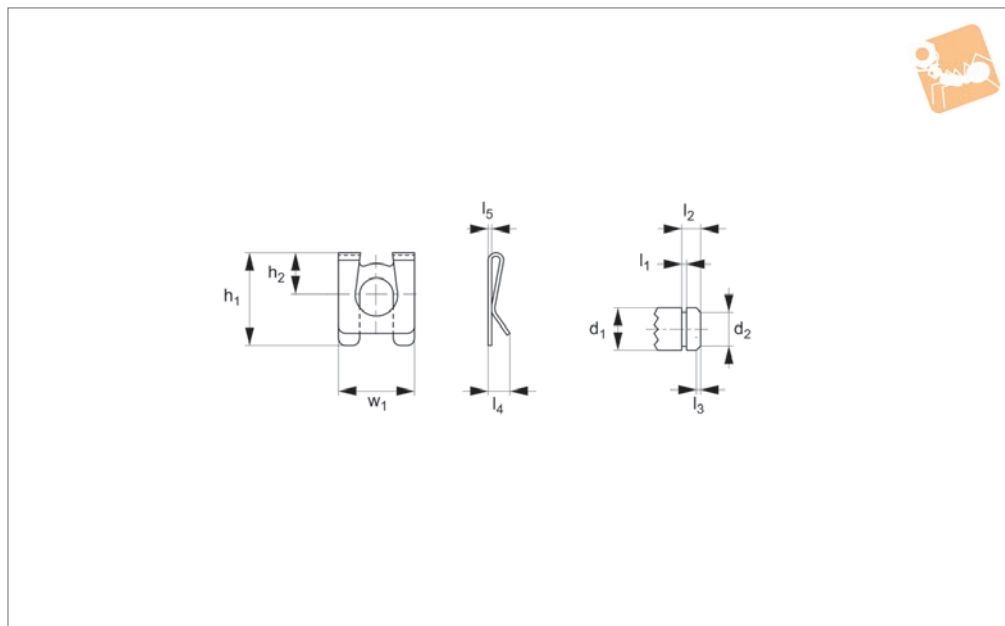

R3441.i

CLEVIS JOINTS & CLIPS

Material

Spring steel, yellow zinc plated, hardened and annealed 1450 to 160c N/mm² tensile strength.

Technical Notes

Yellow zinc is not RoHS Compliant

Tips

Easily assembled and removed by hand without special tools. Compatible with clevis pins. safety lip prevents accidental removal.

Assembly rattle is eliminated by the fast-

ners concave back holding the clevis pin under tension.

Order No.	d ₁	d ₂	h ₁	h ₂	l ₁	l ₂	l ₃	l ₄	l ₅	w	Weight g
R3441.I187	0.1875	0.140	0.429	0.195	0.020	0.090	0.030	0.084	0.015	0.355	0.3
R3441.I250	0.250	0.193	0.562	0.245	0.026	0.110	0.030	0.130	0.018	0.437	0.6
R3441.I312	0.312	0.240	0.679	0.315	0.033	0.130	0.030	0.138	0.020	0.551	1.1
R3441.I375	0.375	0.301	0.844	0.385	0.037	0.167	0.037	0.211	0.020	0.710	2.2
R3441.I500	0.500	0.388	1.200	0.520	0.046	0.208	0.037	0.263	0.020	1.000	5.1